

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 25/50, BPR 25/50 D



Robust and reliable
Best component protection




Precise and save to operate
Comfortable control lever



Simple and safe transport
Transport wheels (optional)

Shipping dimensions in cub.yd

BPR 25/50	0,551
BPR 25/50 D	0,706

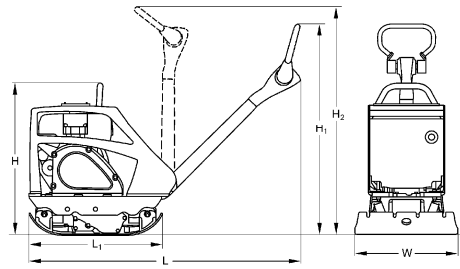

Standard Equipment

- Protective engine covering
- Comfortable control lever
- Low vibration steering rod
- Height adjustable steering rod
- Steering rod lockable in transport and working position
- Vibration and throttle regulation on the steering rod
- Highly wear-resistant, powder-coated base plate
- Fully protected V-belt
- Automatic decompression (BPR25/50D)
- Automatic shutdown at low oil level (BPR25/50)
- Recoil starter
- Back-up drive protection
- 3-2-1 Warranty

Optional Equipment

- Sprinkler system (+28.7lb)
- Transport wheels, puncture-proof (+8.8lb)
- Tool kit
- Special painting
- Plastic mat
- Service Kit

Dimensions in inch

	H	H1	H2	L	L1	W
BPR 25/50	26.0	36.6	40.6	50.2	25.6	19.7
BPR 25/50 D	29.1	34.3	48.0	57.5	25.6	19.7

Technical Data

Weights

Operating weight CECE (W)	lb	309
Basic weight	lb	302

Dimensions

Basic working width	in	19.7
Lowest passing height	in	26.0
Min. height w. steering in top position	in	36.6
Max. height w. steering in top position	in	49.2

Driving Characteristics

Working speed, max.	ft/min	82.0
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer		Honda
Type		GX 160
Emission stage		Stage V / CARB P.
Cooling		air
Number of cylinders		1
Performance SAE J 1349	hp	4.8
Performance ISO 3046	hp	4.2
Speed	rpm	3,600
Drive system		mech.
Fuel		Gasoline
Fuel comsump. aver. during operation	gal/h	0.3

Exciter system

Frequency	vpm	85
Centrifugal force	lb	5,620
Amplitude	in	0.052

Capacities

Fuel	gal	0.8
Water	gal	3.2

Technical modifications reserved. Machines may be shown with options.

**BOMAG
BPR 25/50**

**BOMAG
BPR 25/50 D**

309	342
302	335

19.7	19.7
26.0	29.1
36.6	34.3
49.2	47.2

82.0	82.0
30	30

Hatz	Stage V
1B20	air
1	1
4.2	4.2
4.2	3,000
mech.	mech.
Diesel	Gasoline
0.2	0.2

85	85
5,620	5,620
0.052	0.052

0.8	0.8
3.2	3.2



PRUS 692 52 010

240523 Sa05

BOMAG Americas, Inc.
 125 Blue Granite Parkway
 Ridgeway, SC 29130
 USA
 Tel. +1 803 3370700
 Fax +1 803 3370800
 www.bomag.com/us

