

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 35/60



Robust and reliable
Best component protection



Precise and save to operate
Comfortable control lever




Simple and safe transport
Transport wheels (optional)

Shipping dimensions in cub.yd

BPR 35/60

0,727

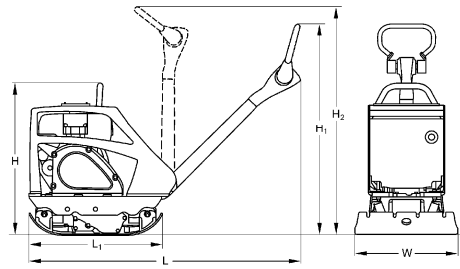

Standard Equipment

- Protective engine covering
- Comfortable control lever
- Height adjustable steering rod
- Low vibration steering rod
- Steering rod lockable in transport and working position
- Vibration and throttle regulation on the steering rod
- Highly wear-resistant, powder-coated base plate
- Fully protected V-belt
- Recoil starter
- Back-up drive protection
- Automatic shutdown at low oil level
- Hour meter (Engine protection hood)
- 3-2-1 Warranty

Optional Equipment

- Engine protection hood (+22lb)
- Transport wheels (+11lb)
- Electric starter+
- Tool kit
- Special painting
- Plastic mat
- Service Kit
- Hour meter

Dimensions in inch

	H	H1	H2	L	L1	W
BPR 35/60	26.0	40.2	45.3	55.3	30.0	23.6

Technical Data

Weights

Operating weight CECE (W)	lb	452
Basic weight	lb	446

Dimensions

Basic working width	in	23.6
Lowest passing height	in	26.0
Min. height w. steering in top position	in	40.2
Max. height w. steering in top position	in	44.1

Driving Characteristics

Working speed, max.	ft/min	88.6
Max. gradeability (dep. on soil con.)	%	32

Drive

Engine manufacturer	Honda
Type	GX 160
Emission stage	Stage V / CARB P.3
Cooling	air
Number of cylinders	1
Performance SAE J 1349	hp 4.8
Speed	rpm 3,600
Drive system	mech.
Fuel	Gasoline
Fuel consump. aver. during operation	gal/h 0.3

Exciter system

Frequency	vpm	80
Centrifugal force	lb	7,868
Amplitude	in	0.051

Capacities

Fuel	gal	0.8
------	-----	-----

Technical modifications reserved. Machines may be shown with options.



PRUS 692 67 010

240523 Sa06

BOMAG Americas, Inc.
 125 Blue Granite Parkway
 Ridgeway, SC 29130
 USA
 Tel. +1 803 3370700
 Fax +1 803 3370800
 www.bomag.com/us

