

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BVP 18/45, BVP 18/45 D



Compact

Guide handle fully foldable



Robust and reliable

V-belt all around protected against damage




Safe transport

Transport handles (standard) and transport wheels (optional)

Shipping dimensions in cub.yd

BVP 18/45 0,195
BVP 18/45 D 0,237

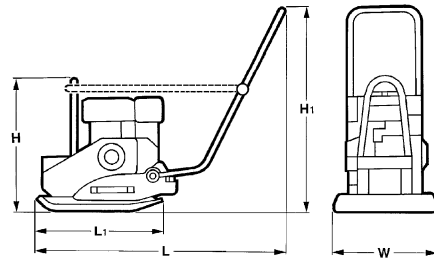

Standard Equipment

- Vibration insulated steering handle, foldable
- Detachable steering handle
- Highly wear resistant base plate
- Automatic shutdown at low oil level (BVP18/45)
- Recoil starter
- Single point lifting device
- Fully protected V-belt
- Carrying handles
- 3-2-1 Warranty
- Engine protection frame (BVP18/45D)
- Automatic decompression (BVP18/45D)

Dimensions in inch

	H	H1	L	L1	W
BVP 18/45	21.1	36.0	43.9	22.0	17.7
BVP 18/45 D	25.6	36.0	43.9	22.0	17.7

Technical Data

Weights

Operating weight CECE	lb	201
Basic weight	lb	198

Dimensions

Working width	in	17.7	17.7
---------------------	----	------	------

Driving Characteristics

Working speed, max.	ft/min	82.0	82.0
Max. gradeability (dep. on soil con.)	%	30	30

Drive

Engine manufacturer	Honda	Hatz
Type	GX 160	1B20
Emission stage	Stage V / CARB P.3	Stage V
Cooling	air	air
Number of cylinders	1	1
Performance SAE J 1349	hp	4.8
Performance ISO 3046	hp	4.2
Speed	rpm	3,600
Drive system	mech.	mech.
Fuel	Gasoline	Diesel
Fuel comsump. aver. during operation	gal/h	0.3

Exciter system

Frequency	vpm	90	90
Centrifugal force	lb	4.047/899	4.047/899
Amplitude	in	0.073	0.073

Capacities

Fuel	gal	0.8	0.8
Water	gal	1.8	1.8

Technical modifications reserved. Machines may be shown with options.

Optional Equipment

- Sprinkler system (+15.4lb)
- Transport wheels (+8.8lb)
- Plastic mat
- Tool kit
- Service Kit
- TOUGH WARRANTY
- Comfort guide handle
- Special painting
- Engine protection frame (BVP18/45)



PRUS 834 12 010

030423 Sa06

BOMAG Americas, Inc.
 125 Blue Granite Parkway
 Ridgeway, SC 29130
 USA
 Tel. +1 803 3370700
 Fax +1 803 3370800
 www.bomag.com/us

